
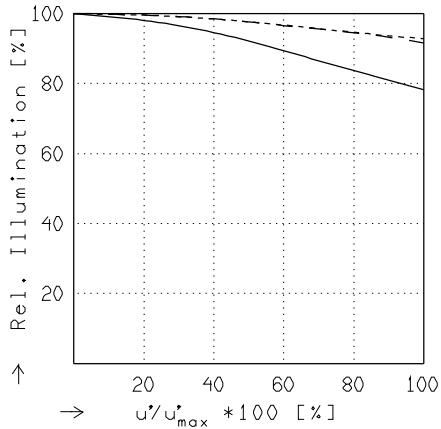


## CL Premiere 1.7/50 ASPHERIC

$f' = 50.3 \text{ mm}$      $\beta_p = 1.570$   
 $s_F = -26.0 \text{ mm}$      $s_{EP} = 6.0 \text{ mm}$   
 $s_{F'} = 32.8 \text{ mm}$      $s_{AP} = -46.2 \text{ mm}$   
 $HH' = -2.6 \text{ mm}$      $\Sigma d = 39.2 \text{ mm}$

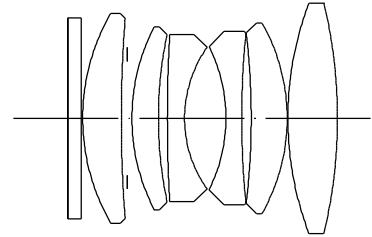


### RELATIVE ILLUMINATION

The relative illumination is shown for the given focal distances or magnifications.

$f / 1.7$


—  $\beta' = 0.0000$      $u'_{max} = 13.7$      $00' = \infty$   
 - -  $\beta' = 0.0000$      $u'_{max} = 13.7$      $00' = \infty$   
 ····  $\beta' = 0.0000$      $u'_{max} = 13.7$      $00' = \infty$

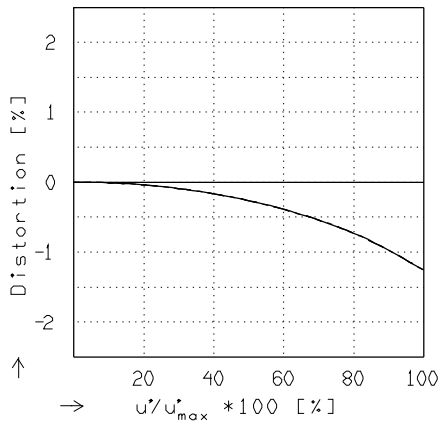

### DISTORTION

Distortion is shown for the given focal distances or magnifications. Positive values indicate pincushion distortion and negative values barrel distortion.

—  $\beta' = 0.0000$      $u'_{max} = 13.7$      $00' = \infty$   
 - -  $\beta' = 0.0000$      $u'_{max} = 13.7$      $00' = \infty$   
 ····  $\beta' = 0.0000$      $u'_{max} = 13.7$      $00' = \infty$

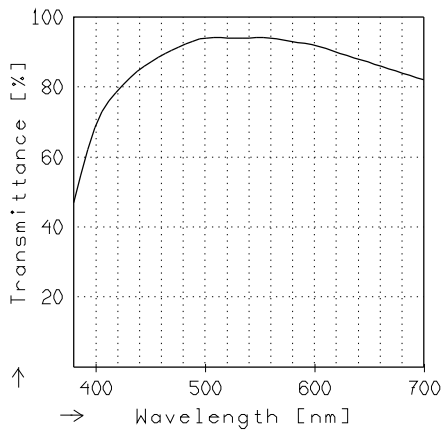

### TRANSMITTANCE

Relative spectral transmittance is shown with reference to wavelength.




Jos. Schneider Optische Werke GmbH  
 Ringstrasse 132 55543 Bad Kreuznach Germany

# CL Premiere 1.7/50 ASPHERIC

MODULATION with reference to the relative image height

Wavelength $\lambda$	[nm]	546	644	610	570	510	480
Spectral weighting	[%]	28.3	4.5	17.8	29.4	16.0	4.0
Spatial frequency R	[1/mm]	20	40	80			
Format	[mm X mm]	18.0	X	21.3			
Diagonal $2u'$	[mm]	27.7					

radial —  
 tangential - -

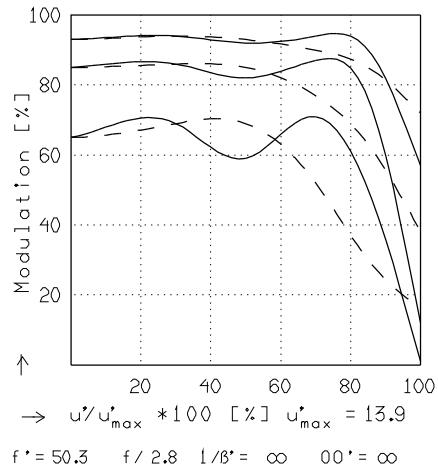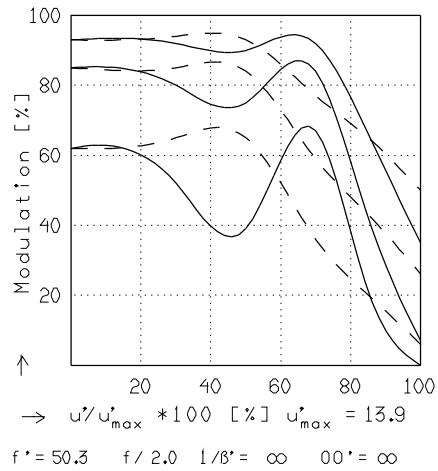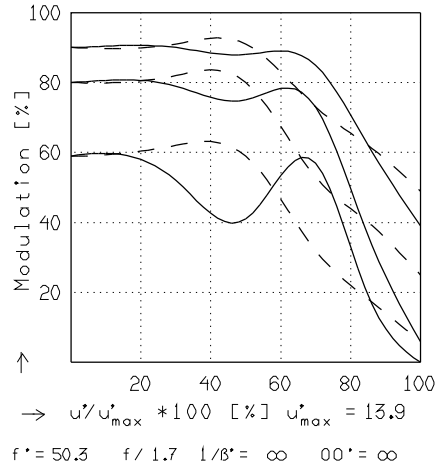

Focusing :  $MTF_{max}$  at  $f / 1.7$  ,  $R = 80$  1/mm ,  $u'/u'_{max} = 0$

0.17%

0.17%

0.17%

48231 211204 Printed in the Federal Republic of Germany